

G2700E

ELECTRIC SERIES



ABLECTRIC
BATTERY POWERED • LOW EMISSION
CONSTRUCTION EQUIPMENT

GIANT
BY TOBROCO

Sourcewell
Awarded Contract
Contract # 020223-TBO

POPULAR OPTIONS

150A-300A External Fast Charge
Opportunity Charging
Cab/Heat or Foldable ROPS
Oil Cooler
14-pin Connector
Boom Suspension (Ride Control)
Heated Air-ride Seat
Stabilo



QUICK SPECS	G2700E	G2700E X-TRA
Battery	Jungheinrich 48V, 520Ah	Jungheinrich 48V, 520Ah
Drive motor	Electric, 7 kW	Electric, 7 kW
Hydraulic motor	Electric, 12 kW	Electric, 12 kW
Drive system	Electric 4WD Limited Slip	Electric 4WD Limited Slip
Plate style	Full size skid (SSL)	Full size skid (SSL)
Hydraulic flow	10.6 GPM	10.6 GPM
Lift capacity	4629 lbs.	4850 lbs.
Tipping load	4938 lbs.	5732 lbs.
Lift height	116.6 in.	98 in.
Machine weight	5709 lbs.	5709 lbs.
Road speed	11 mph, 3 speed	11 mph, 3 speed
On-board charger	60A	60A
Run time, est.	4-8 hours	4-8 hours
Charge time, est.	Overnight, 7-12 hours	Overnight, 7-12 hours

G2700E

ELECTRIC SERIES



GIANT
BY TOBROCO

Sourcewell
Awarded Contract
Contract # 020223-TBO



CLEAR
360 Degree
Visibility



SAFE
Ergonomic &
Side Entry




COMFORT
Articulation &
Oscillation



LIGHT
Less Ground
Damage



FAST
High Travel
Speeds

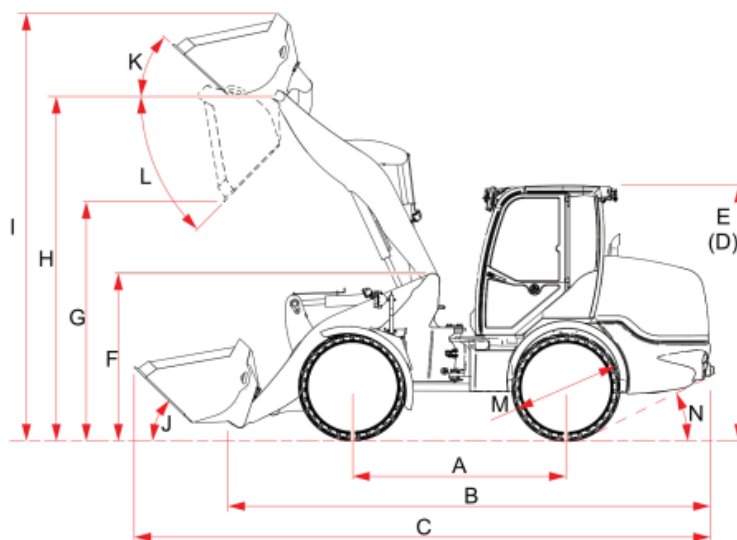

G2700E DIMENSIONS

A. 65 IN
B. 134 IN
C. 164.6 IN
D. 92.1 IN
E. NA
F. 68.9 IN
G. 87 IN

H. 117.3 IN
I. 140.6 IN
J. 45 DEGREES
D. 53 DEGREES
E. 37 DEGREES
F. 33.5 IN
G. 25 DEGREES