


Boom cylinder lifting capacity (SAE method)

Front lifting, Blade fulcrum, with standard arm

Lifting loads in this table indicate 75% of tipping load or 87% of relief load, whichever is the smallest.

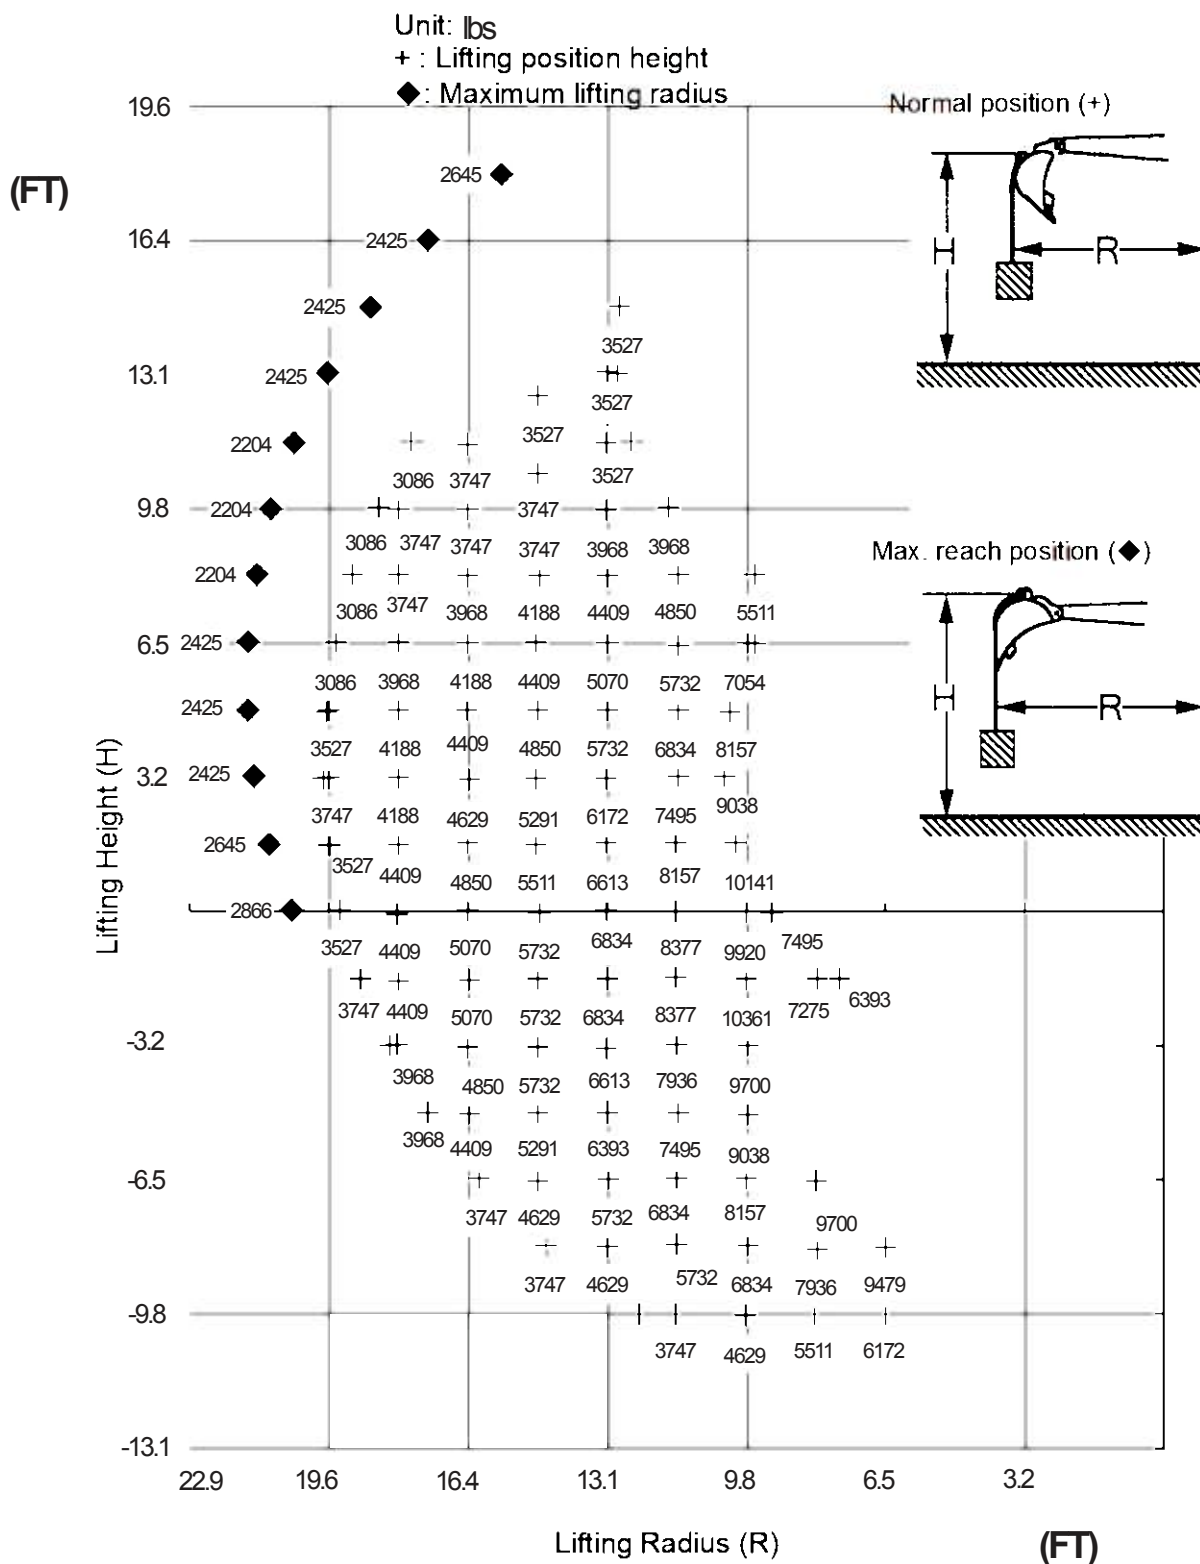

Boom cylinder lifting capacity (SAE method)

Side lifting, with standard arm

Lifting loads in this table indicate 75% of tipping load or 87% of relief load, whichever is the smallest.

Unit: lbs

+: Lifting position height

◆: Maximum lifting radius

(FT)

